

**ATM63HE** HI-ENERGY® Hypercardioid Dynamic Microphone

- Ideal for toms, snare, guitar cabinets, piano and vocals
- Features fast transients, excellent isolation and peak-free response
- Hi-ENERGY® neodymium element
- Natural, balanced pickup both on- and off-axis
- Extremely rugged design with all-metal grille

## ATM63HE Specifications

**Element**

Neodymium Dynamic

**Polar Pattern**

Hypercardioid

**Frequency Response**

50 - 18,000 Hz

**Open Circuit Sensitivity**

-52 dB (2.5 mV) re 1V at 1 Pa

**Impedance**

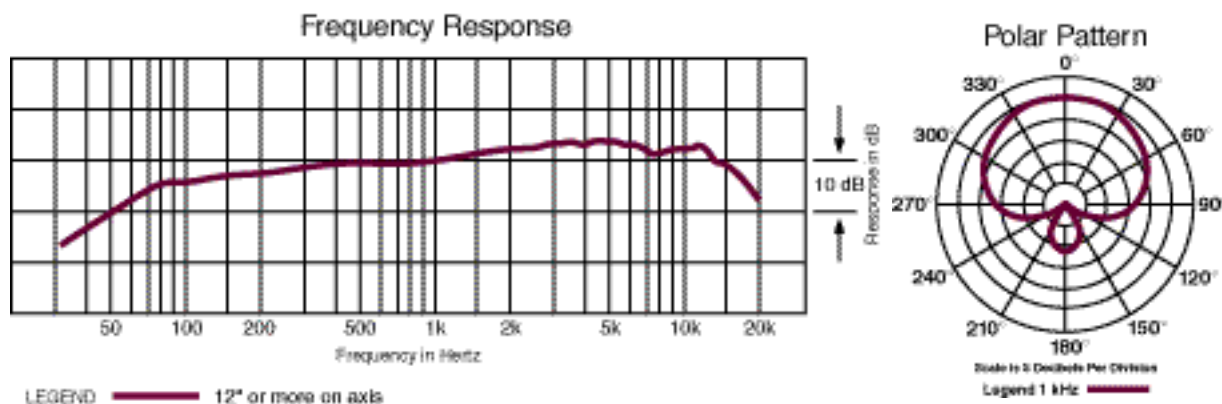
600 ohms

**Weight**

9.3 oz (265 g)

**Output Connector**

XLRM-type

**Accessories Furnished:** AT8406 stand clamp; foam windscreen; protective pouch[Conditions and Warranty](#)

home site map alphanumeric glossary  
product list